

SMBJ-AT Series

ROHS

600W

Surface Mount Transient Voltage Suppressors

Description

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

Working Voltage: 5.0 to 440V

Features

- ◆ Glass passivated or planar junction
- ◆ Excellent clamping capability
- ◆ Repetition rate (duty cycle): 0.01%
- ◆ Low profile package and low inductance
- ◆ 600W Peak Pulse power capability at 10×1000μs waveform
- ◆ Fast response time: typically less than 1.0ps from 0V to VBR min
- ◆ High temperature soldering: 260°C/10s at terminals
- ◆ Plastic package has Underwriters Laboratory Flammability 94V-0
- ◆ Halogen free and RoHS compliant
- ◆ For surface mounted applications in order to optimize board space
- ◆ High reliability application and automotive grade AECQ101 qualified
- ◆ IEC-61000-4-2 ESD 30kV(Air), 30kV (Contact)
- ◆ ESD protection of data lines in accordance with IEC 61000-4-2
- ◆ EFT protection of data lines in accordance with IEC 61000-4-4

Mechanical Data

- ◆ Package: SMB/DO-214AA
- ◆ Case Material: "Green" Molding Compound.
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Polarity: Color band denotes cathode except bi-directional models
- ◆ Standard Packaging: 12mm tape (EIA STD RS-481)
- ◆ Weight: 0.1g
- ◆ Terminal Connections: See Diagram Below
- ◆ Marking Information: See Below


Maximum Ratings and Thermal Characteristics(TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak power dissipation with a 10/1000us waveform	PPPM	600	W
Steady state power dissipation at TL=75°C	PM(AV)	1.0	W
Maximum Instantaneous Forward Voltage at 30A for Unidirectional	VF	5.0	V
Junction and Storage temperature range	TJ , TSTG	- 55 to +150	°C
Operating temperature range	TOP	- 55 to +150	°C




www.unsemi.com.tw


Uni-directional



Bi-directional



Functional Diagram

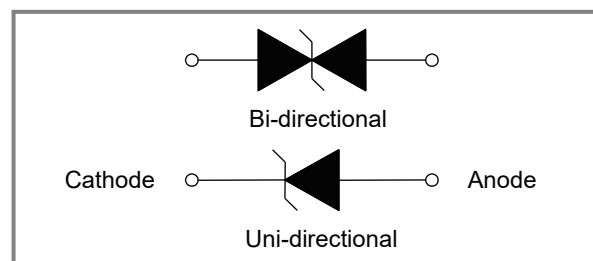

Applications

- ◆ I/O Interface.
- ◆ AC/DC Power supply
- ◆ Low frequency signal transmission line (RS232, RS485, etc.)

Electrical Characteristics (Ta=25°C unless otherwise noted) (Continue)

Part Number		Marking		Reverse Stand-Off Voltage VRWM (V)	Breakdown Voltage VBR (V) @IT		Test Current IT (mA)	Maximum Clamping Voltage Vc @IPP (V)	Maximum Peak Pulse Current IPP (A)	Maximum Reverse Leakage IR @VRWM (μA)
Uni	Bi	Uni	Bi		MIN	MAX				
SMBJ5.0A-AT	SMBJ5.0CA-AT	KER	AET	5.0	6.40	7.00	10	9.2	65.2	800
SMBJ6.0A-AT	SMBJ6.0CA-AT	KGT	AGT	6.0	6.67	7.37	10	10.3	58.3	800
SMBJ6.5A-AT	SMBJ6.5CA-AT	KKT	AKT	6.5	7.22	7.98	10	11.2	53.6	500
SMBJ7.0A-AT	SMBJ7.0CA-AT	KMT	AMT	7.0	7.78	8.60	10	12.0	50.0	200
SMBJ7.5A-AT	SMBJ7.5CA-AT	KPT	APT	7.5	8.33	9.21	1	12.9	46.5	100
SMBJ8.0A-AT	SMBJ8.0CA-AT	KRT	ART	8.0	8.89	9.83	1	13.6	44.1	50
SMBJ8.5A-AT	SMBJ8.5CA-AT	KTT	ATT	8.5	9.44	10.40	1	14.4	41.7	20
SMBJ9.0A-AT	SMBJ9.0CA-AT	KVT	AVT	9.0	10.00	11.10	1	15.4	39.0	10
SMBJ10A-AT	SMBJ10CA-AT	KXT	AXT	10	11.10	12.30	1	17.0	35.3	5
SMBJ11A-AT	SMBJ11CA-AT	KZT	WZT	11	12.20	13.50	1	18.2	33.0	1
SMBJ12A-AT	SMBJ12CA-AT	LET	BET	12	13.30	14.70	1	19.9	30.2	1
SMBJ13A-AT	SMBJ13CA-AT	LGT	BGT	13	14.40	15.90	1	21.5	27.9	1
SMBJ14A-AT	SMBJ14CA-AT	LKT	BKT	14	15.60	17.20	1	23.2	25.9	1
SMBJ15A-AT	SMBJ15CA-AT	LMT	BMT	15	16.70	18.50	1	24.4	24.6	1
SMBJ16A-AT	SMBJ16CA-AT	LPT	BPT	16	17.80	19.70	1	26.0	23.1	1
SMBJ17A-AT	SMBJ17CA-AT	LRT	BRT	17	18.90	20.90	1	27.6	21.8	1
SMBJ18A-AT	SMBJ18CA-AT	LTT	BTT	18	20.00	22.10	1	29.2	20.6	1
SMBJ20A-AT	SMBJ20CA-AT	LVT	BVT	20	22.20	24.50	1	32.4	18.6	1
SMBJ22A-AT	SMBJ22CA-AT	LXT	BXT	22	24.40	26.90	1	35.5	16.9	1
SMBJ24A-AT	SMBJ24CA-AT	LZT	BZT	24	26.70	29.50	1	38.9	15.4	1
SMBJ26A-AT	SMBJ26CA-AT	MET	CET	26	28.90	31.90	1	42.1	14.3	1
SMBJ28A-AT	SMBJ28CA-AT	MGT	CGT	28	31.10	34.40	1	45.4	13.2	1
SMBJ30A-AT	SMBJ30CA-AT	MKT	CKT	30	33.30	36.80	1	48.4	12.4	1
SMBJ33A-AT	SMBJ33CA-AT	MMT	CMT	33	36.70	40.60	1	53.3	11.3	1
SMBJ36A-AT	SMBJ36CA-AT	MPT	CPT	36	40.00	44.20	1	58.1	10.4	1
SMBJ40A-AT	SMBJ40CA-AT	MRT	CRT	40	44.40	49.10	1	64.5	9.3	1
SMBJ43A-AT	SMBJ43CA-AT	MTT	CTT	43	47.80	52.80	1	69.4	8.7	1
SMBJ45A-AT	SMBJ45CA-AT	MVT	CVT	45	50.00	55.30	1	72.7	8.3	1
SMBJ48A-AT	SMBJ48CA-AT	MXT	CXT	48	53.30	58.90	1	77.4	7.8	1
SMBJ51A-AT	SMBJ51CA-AT	MZT	CZT	51	56.70	62.70	1	82.4	7.3	1

Electrical Characteristics (Ta=25°C unless otherwise noted) (Continue)

Part Number		Marking		Reverse Stand-Off Voltage VRWM (V)	Breakdown Voltage VBR (V) @IT		Test Current IT (mA)	Maximum Clamping Voltage Vc @IPP (V)	Maximum Peak Pulse Current IPP (A)	Maximum Reverse Leakage IR @VRWM (μA)
Uni	Bi	Uni	Bi		MIN	MAX				
SMBJ54A-AT	SMBJ54CA-AT	NET	DET	54	60.00	66.30	1	87.1	6.9	1
SMBJ58A-AT	SMBJ58CA-AT	NGT	DGT	58	64.40	71.20	1	93.6	6.4	1
SMBJ60A-AT	SMBJ60CA-AT	NKT	DKT	60	66.70	73.70	1	96.8	6.2	1
SMBJ64A-AT	SMBJ64CA-AT	NMT	DMT	64	71.10	78.60	1	103.0	5.8	1
SMBJ70A-AT	SMBJ70CA-AT	NPT	DPT	70	77.80	86.00	1	113.0	5.3	1
SMBJ75A-AT	SMBJ75CA-AT	NRT	DRT	75	83.30	92.10	1	121.0	5.0	1
SMBJ78A-AT	SMBJ78CA-AT	NTT	DTT	78	86.70	95.80	1	126.0	4.8	1
SMBJ85A-AT	SMBJ85CA-AT	NVT	DVT	85	94.40	104.0	1	137.0	4.4	1
SMBJ90A-AT	SMBJ90CA-AT	NXT	DXT	90	100.0	111.0	1	146.0	4.1	1
SMBJ100A-AT	SMBJ100CA-AT	NZT	DZT	100	111.0	123.0	1	162.0	3.7	1
SMBJ110A-AT	SMBJ110CA-AT	PET	EET	110	122.0	135.0	1	177.0	3.4	1
SMBJ120A-AT	SMBJ120CA-AT	PGT	EGT	120	133.0	147.0	1	193.0	3.1	1
SMBJ130A-AT	SMBJ130CA-AT	PKT	EKT	130	144.0	159.0	1	209.0	2.9	1
SMBJ150A-AT	SMBJ150CA-AT	PMT	EMT	150	167.0	185.0	1	243.0	2.5	1
SMBJ160A-AT	SMBJ160CA-AT	PPT	EPT	160	178.0	197.0	1	259.0	2.3	1
SMBJ170A-AT	SMBJ170CA-AT	PRT	ERT	170	189.0	209.0	1	275.0	2.2	1
SMBJ180A-AT	SMBJ180CA-AT	PTT	ETT	180	201.0	222.0	1	292.0	2.1	1
SMBJ190A-AT	SMBJ190CA-AT	PVT	EVT	190	211.0	234.0	1	307.0	2.0	1
SMBJ200A-AT	SMBJ200CA-AT	PWT	EWT	200	224.0	247.0	1	324.0	1.9	1
SMBJ210A-AT	SMBJ210CA-AT	PUT	EUT	210	233.0	258.0	1	337.0	1.8	1
SMBJ220A-AT	SMBJ220CA-AT	PXT	EXT	220	246.0	272.0	1	356.0	1.7	1
SMBJ250A-AT	SMBJ250CA-AT	PZT	EZT	250	279.0	309.0	1	405.0	1.5	1
SMBJ300A-AT	SMBJ300CA-AT	QET	FET	300	335.0	371.0	1	486.0	1.3	1
SMBJ350A-AT	SMBJ350CA-AT	QGT	FGT	350	391.0	432.0	1	567.0	1.1	1
SMBJ400A-AT	SMBJ400CA-AT	QKT	FKT	400	447.0	494.0	1	648.0	0.9	1
SMBJ440A-AT	SMBJ440CA-AT	QMT	FMT	440	492.0	543.0	1	713.0	0.8	1

Note:

- (1) Add suffix ' CA ' after part number to specify Bi-directional devices
- (2) Suffix 'A ' denotes 5% tolerance device

Ratings and Characteristic Curves (TA=25°C unless otherwise noted)

Figure 1 - Pulse Waveform

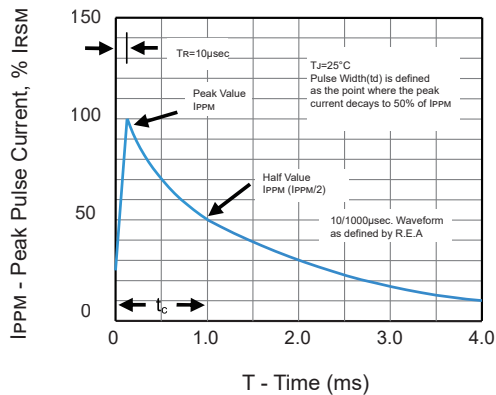


Figure 2 - Pulse Derating Curve

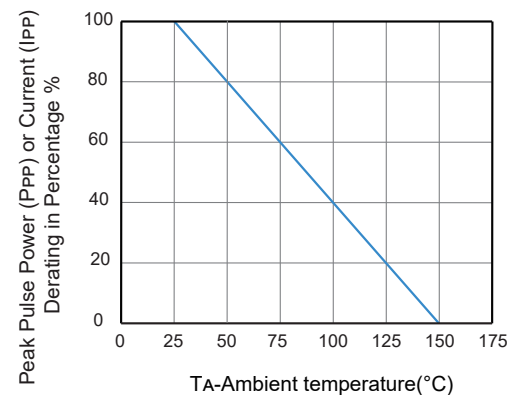


Figure 3 - Peak Pulse Power Rating Curve

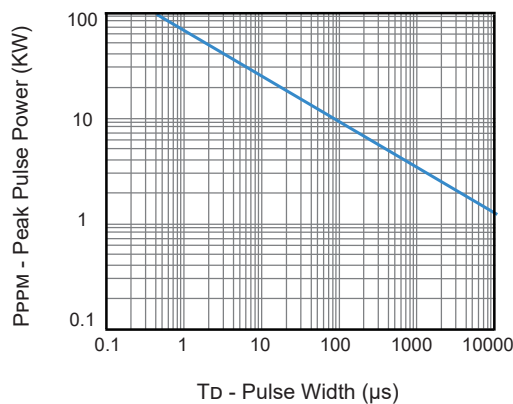


Figure 4 - Steady State Power Derating Current

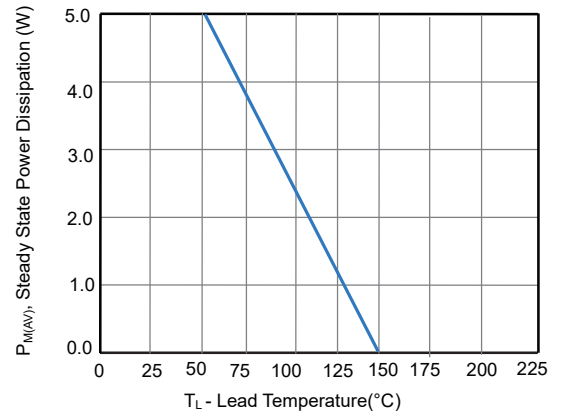


Figure 5 - Maximum Non-Repetitive Surge Current




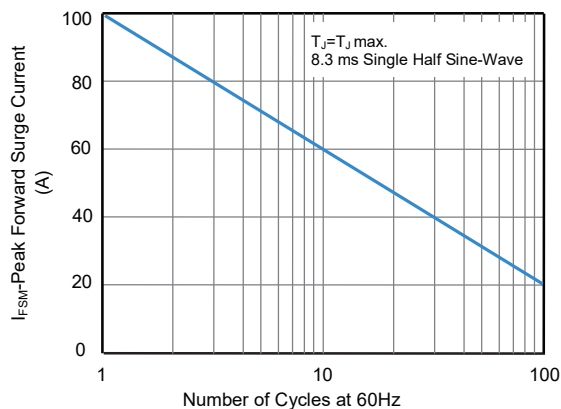



Figure 6 - Typical Junction Capacitance

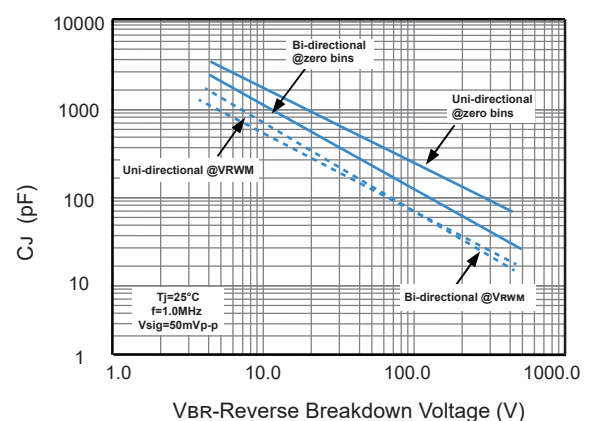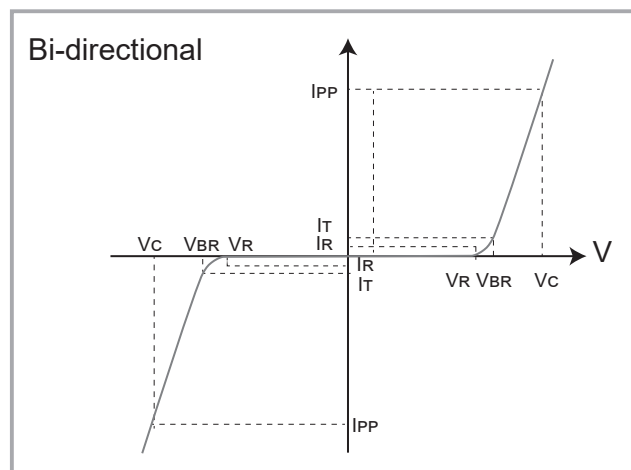

I-V Curve Characteristics

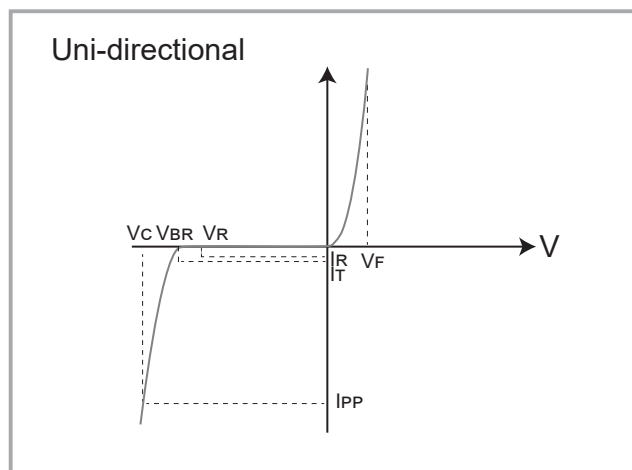


Soldering Parameters

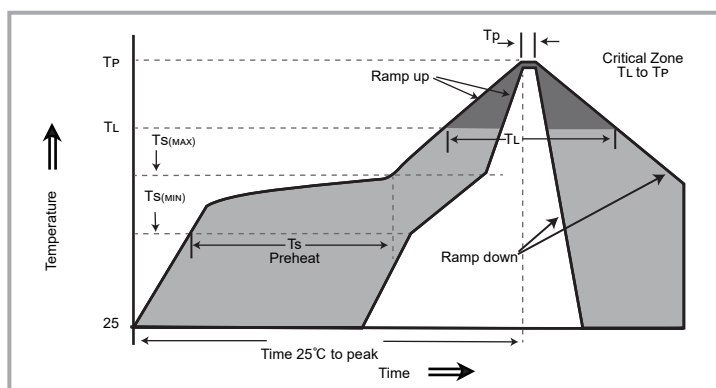

Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min (Ts(min))	150°C
	-Temperature Max (Ts(max))	200°C
	- Time (min to max) (Ts)	60 -180 Seconds
Average ramp up rate (Liquidus Temp TL) to peak		3°C/second max
Ts(max) to TL - Ramp-up Rate		5°C/second max
Reflow	- Temperature (TL) (Liquidus)	217°C
	- Time (min to max) (Ts)	60 -150 Seconds
Peak Temperature (Tp)		260 +0/-5°C
Time within 5°C of actual peak Temperature (Tp)		20 - 40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (Tp)		8 minutes Max
Do not exceed		260°C

Dimensions

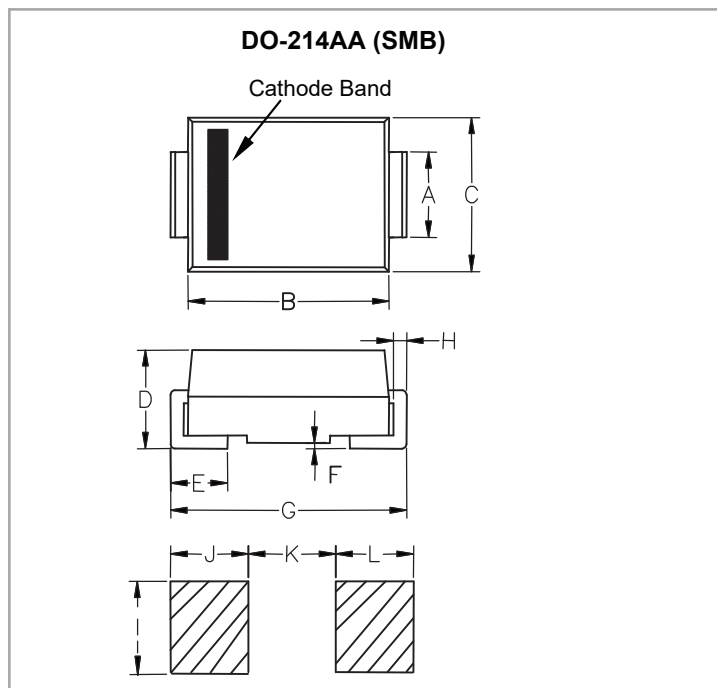

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.077	0.087	1.960	2.200
B	0.171	0.191	4.350	4.850
C	0.130	0.155	3.300	3.940
D	0.084	0.096	2.130	2.440
E	0.030	0.060	0.750	1.520
F	-	0.008	-	0.203
G	0.201	0.216	5.100	5.500
H	0.006	0.012	0.152	0.305
I	0.089	-	2.260	-
J	0.085	-	2.160	-
K	-	0.107	-	2.740
L	0.085	-	2.160	-

Part Numbering

S M B J	XX	C	A	-AT	
					Vehicle
					5% V_{BR} Voltage Tolerance
					Bi-Directional
					V_R Voltage
					Series

Ordering Information

Part Number	Component Package	Quantity	Packaging Option	Packaging Specification
SMBJ-AT Series	DO-214AA (SMB)	3,000	Tape & Reel -12mm/13"tape	EIA STD RS-481

Disclaimer

UNSEMI RESERVES THE RIGHT TO MAKE CHANGE ON OUR PRODUCTS , PRODUCTS SPECIFICATION AND DATA WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

UN SEMICONDUCTOR LIMITED its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "UNSEMI") does not give any representations or warranties for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

In no event shall UNSEMI be liable for any indirect, incidental, punitive, special or consequential damages (including any and all implied warranties, warranties of fitness for particular purpose, non-infringement and merchantability.) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Statements regarding the suitability of products for certain types of applications are based on UNSEMI knowledge of typical requirements that are often placed on UNSEMI products in generic applications. Such statements are not binding, statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify UNSEMI's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise agreed in writing, UNSEMI product is not designed, authorized or warranted to be suitable for use in medical life-saving, or life-sustaining application , nor in applications where failure or malfunction of a UNSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. UNSEMI and its suppliers accept no liability for inclusion or use of UNSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

All referenced brands, product names, service names and trademarks are the property of their respective owners.