

SMCJ-AT Series

ROHS

1500W

Surface Mount Transient Voltage Suppressors

Description

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

Working Voltage: 5.0 to 440V

Features

- ◆ Glass passivated or planar junction
- ◆ Excellent clamping capability
- ◆ Repetition rate (duty cycle): 0.01%
- ◆ Low profile package and low inductance
- ◆ 1500W Peak Pulse power capability at 10×1000μs waveform
- ◆ Fast response time: typically less than 1.0ps from 0V to VBR min
- ◆ High temperature soldering: 260°C/10s at terminals
- ◆ Plastic package has Underwriters Laboratory Flammability 94V-0
- ◆ Halogen free and RoHS compliant
- ◆ For surface mounted applications in order to optimize board space
- ◆ High reliability application and automotive grade AECQ101 qualified
- ◆ IEC-61000-4-2 ESD 30kV(Air), 30kV (Contact)
- ◆ ESD protection of data lines in accordance with IEC 61000-4-2
- ◆ EFT protection of data lines in accordance with IEC 61000-4-4

Mechanical Data


- ◆ Package: SMC/DO-214AB
- ◆ Case Material: “Green” Molding Compound.
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Polarity: Color band denotes cathode except bi-directional models
- ◆ Weight: 0.28g
- ◆ Terminal Connections: See Diagram Below
- ◆ Marking Information: See Below

Maximum Ratings and Thermal Characteristics(TA=25°C unless otherwise noted)


Parameter	Symbol	Value	Unit
Peak power dissipation with a 10/1000us waveform	PPPM	1500	W
Steady state power dissipation at TL=75°C	PM(AV)	8.0	W
Maximum Instantaneous Forward Voltage at 30A for Unidirectional	VF	5.0	V
Junction and Storage temperature range	TJ , TSTG	- 55 to +150	°C
Operating temperature range	TOP	- 55 to +150	°C



www.unsemi.com.tw

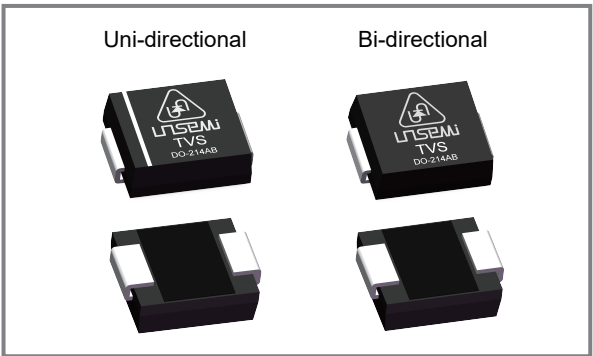

Functional Diagram

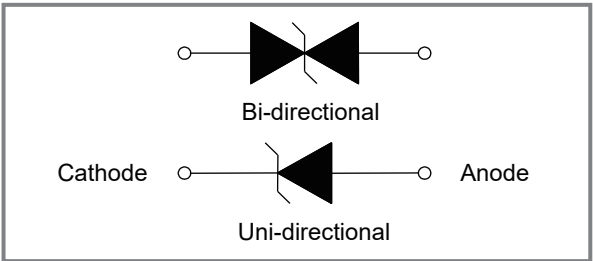

Applications

- ◆ I/O Interface.
- ◆ AC/DC Power supply
- ◆ Low frequency signal transmission line (RS232, RS485, etc.)

Electrical Characteristics (Ta=25°C unless otherwise noted) (Continue)

Part Number		Marking		Reverse Stand-Off Voltage VRWM (V)	Breakdown Voltage VBR (V) @IT		Test Current IT (mA)	Maximum Clamping Voltage Vc @IPP (V)	Maximum Peak Pulse Current IPP (A)	Maximum Reverse Leakage IR @VRWM (μA)
Uni	Bi	Uni	Bi		MIN	MAX				
SMCJ5.0A-AT	SMCJ5.0CA-AT	GDET	BDET	5.0	6.40	7.00	10	9.2	163.0	800
SMCJ6.0A-AT	SMCJ6.0CA-AT	GDGT	BDGT	6.0	6.67	7.37	10	10.3	145.7	800
SMCJ6.5A-AT	SMCJ6.5CA-AT	GDKT	BDKT	6.5	7.22	7.98	10	11.2	134.0	500
SMCJ7.0A-AT	SMCJ7.0CA-AT	GDMT	BDMT	7.0	7.78	8.60	10	12.0	125.0	200
SMCJ7.5A-AT	SMCJ7.5CA-AT	GDPT	BDPT	7.5	8.33	9.21	1	12.9	116.3	100
SMCJ8.0A-AT	SMCJ8.0CA-AT	GDRT	BDRT	8.0	8.89	9.83	1	13.6	110.3	50
SMCJ8.5A-AT	SMCJ8.5CA-AT	GDTT	BDTT	8.5	9.44	10.40	1	14.4	104.2	20
SMCJ9.0A-AT	SMCJ9.0CA-AT	GDVT	BDVT	9.0	10.00	11.10	1	15.4	97.4	10
SMCJ10A-AT	SMCJ10CA-AT	GDXT	BDXT	10	11.10	12.30	1	17.0	88.3	5
SMCJ11A-AT	SMCJ11CA-AT	GDZT	BDZT	11	12.20	13.50	1	18.2	82.5	1
SMCJ12A-AT	SMCJ12CA-AT	GEET	BEET	12	13.30	14.70	1	19.9	75.4	1
SMCJ13A-AT	SMCJ13CA-AT	GEGT	BEGT	13	14.40	15.90	1	21.5	69.8	1
SMCJ14A-AT	SMCJ14CA-AT	GEKT	BEKT	14	15.60	17.20	1	23.2	64.7	1
SMCJ15A-AT	SMCJ15CA-AT	GEMT	BEMT	15	16.70	18.50	1	24.4	61.5	1
SMCJ16A-AT	SMCJ16CA-AT	GEPT	BEPT	16	17.80	19.70	1	26.0	57.7	1
SMCJ17A-AT	SMCJ17CA-AT	GERT	BERT	17	18.90	20.90	1	27.6	54.4	1
SMCJ18A-AT	SMCJ18CA-AT	GETT	BETT	18	20.00	22.10	1	29.2	51.4	1
SMCJ20A-AT	SMCJ20CA-AT	GEVT	BEVT	20	22.20	24.50	1	32.4	46.3	1
SMCJ22A-AT	SMCJ22CA-AT	GEXT	BEXT	22	24.40	26.90	1	35.5	42.3	1
SMCJ24A-AT	SMCJ24CA-AT	GEZT	BEZT	24	26.70	29.50	1	38.9	38.6	1
SMCJ26A-AT	SMCJ26CA-AT	GFET	BFET	26	28.90	31.90	1	42.1	35.7	1
SMCJ28A-AT	SMCJ28CA-AT	GFGT	BFGT	28	31.10	34.40	1	45.4	33.1	1
SMCJ30A-AT	SMCJ30CA-AT	GFKT	BFKT	30	33.30	36.80	1	48.4	31.0	1
SMCJ33A-AT	SMCJ33CA-AT	GFMT	BFMT	33	36.70	40.60	1	53.3	28.2	1
SMCJ36A-AT	SMCJ36CA-AT	GFPT	BFPT	36	40.00	44.20	1	58.1	25.9	1
SMCJ40A-AT	SMCJ40CA-AT	GFRT	BFRT	40	44.40	49.10	1	64.5	23.3	1
SMCJ43A-AT	SMCJ43CA-AT	GFTT	BFTT	43	47.80	52.80	1	69.4	21.7	1
SMCJ45A-AT	SMCJ45CA-AT	GFVT	BFVT	45	50.00	55.30	1	72.7	20.6	1
SMCJ48A-AT	SMCJ48CA-AT	GFXT	BFXT	48	53.30	58.90	1	77.4	19.4	1
SMCJ51A-AT	SMCJ51CA-AT	GFZT	BFZT	51	56.70	62.70	1	82.4	18.2	1

Electrical Characteristics (Ta=25°C unless otherwise noted) (Continue)

Part Number		Marking		Reverse Stand-Off Voltage VRWM (V)	Breakdown Voltage VBR (V) @IT		Test Current IT (mA)	Maximum Clamping Voltage Vc @IPP (V)	Maximum Peak Pulse Current IPP (A)	Maximum Reverse Leakage IR @VRWM (μA)
Uni	Bi	Uni	Bi		MIN	MAX				
SMCJ54A-AT	SMCJ54CA-AT	GGET	BGET	54	60.00	66.30	1	87.1	17.3	1
SMCJ58A-AT	SMCJ58CA-AT	GGGT	BGGT	58	64.40	71.20	1	93.6	16.1	1
SMCJ60A-AT	SMCJ60CA-AT	GGKT	BGKT	60	66.70	73.70	1	96.8	15.5	1
SMCJ64A-AT	SMCJ64CA-AT	GGMT	BGMT	64	71.10	78.60	1	103.0	14.6	1
SMCJ70A-AT	SMCJ70CA-AT	GGPT	BGPT	70	77.80	86.00	1	113.0	13.3	1
SMCJ75A-AT	SMCJ75CA-AT	GGRT	BGRT	75	83.30	92.10	1	121.0	12.4	1
SMCJ78A-AT	SMCJ78CA-AT	GGTT	BGTT	78	86.70	95.80	1	126.0	11.9	1
SMCJ85A-AT	SMCJ85CA-AT	GGVT	BGVT	85	94.40	104.0	1	137.0	11.0	1
SMCJ90A-AT	SMCJ90CA-AT	GGXT	BGXT	90	100.0	111.0	1	146.0	10.3	1
SMCJ100A-AT	SMCJ100CA-AT	GGZT	BGZT	100	111.0	123.0	1	162.0	9.3	1
SMCJ110A-AT	SMCJ110CA-AT	GHET	BHET	110	122.0	135.0	1	177.0	8.5	1
SMCJ120A-AT	SMCJ120CA-AT	GHGT	BHGT	120	133.0	147.0	1	193.0	7.8	1
SMCJ130A-AT	SMCJ130CA-AT	GHKT	BHKT	130	144.0	159.0	1	209.0	7.2	1
SMCJ150A-AT	SMCJ150CA-AT	GHMT	BHMT	150	167.0	185.0	1	243.0	6.2	1
SMCJ160A-AT	SMCJ160CA-AT	GHPT	BHPT	160	178.0	197.0	1	259.0	5.8	1
SMCJ170A-AT	SMCJ170CA-AT	GHRT	BHRT	170	189.0	209.0	1	275.0	5.5	1
SMCJ180A-AT	SMCJ180CA-AT	GHTT	BHTT	180	201.0	222.0	1	292.0	5.1	1
SMCJ190A-AT	SMCJ190CA-AT	GHVT	BHVT	190	211.0	234.0	1	307.0	4.8	1
SMCJ200A-AT	SMCJ200CA-AT	GHWT	BHWT	200	224.0	247.0	1	324.0	4.6	1
SMCJ210A-AT	SMCJ210CA-AT	GHUT	BHUT	210	233.0	258.0	1	337.0	4.4	1
SMCJ220A-AT	SMCJ220CA-AT	GHXT	BHXT	220	246.0	272.0	1	356.0	4.2	1
SMCJ250A-AT	SMCJ250CA-AT	GHZT	BHZT	250	279.0	309.0	1	405.0	3.7	1
SMCJ300A-AT	SMCJ300CA-AT	GJET	BJET	300	335.0	371.0	1	486.0	3.1	1
SMCJ350A-AT	SMCJ350CA-AT	GJGT	BJGT	350	391.0	432.0	1	567.0	2.6	1
SMCJ400A-AT	SMCJ400CA-AT	GJKT	BJKT	400	447.0	494.0	1	648.0	2.3	1
SMCJ440A-AT	SMCJ440CA-AT	GJMT	BJMT	440	492.0	543.0	1	713.0	2.1	1

Note:

- (1) Add suffix ' CA ' after part number to specify Bi-directional devices
- (2) Suffix 'A ' denotes 5% tolerance device

Ratings and Characteristic Curves (TA=25°C unless otherwise noted)

Figure 1 - Pulse Waveform



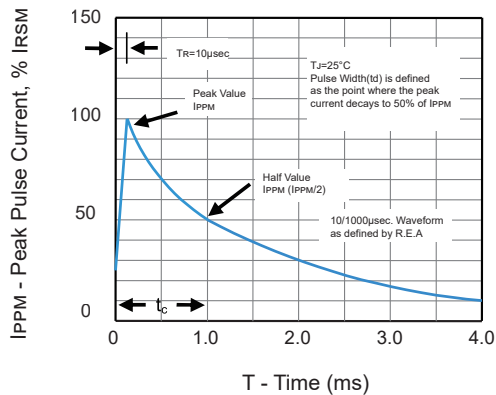


Figure 2 - Pulse Derating Curve

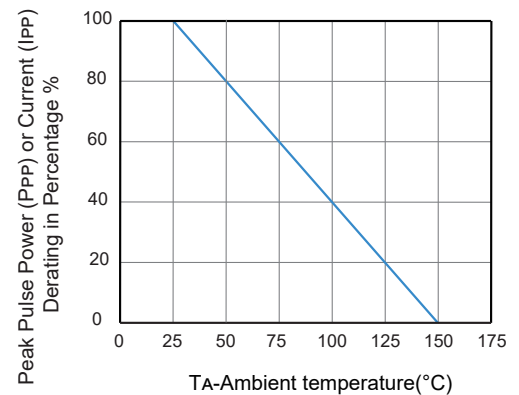


I-V Curve Characteristics

Uni-directional

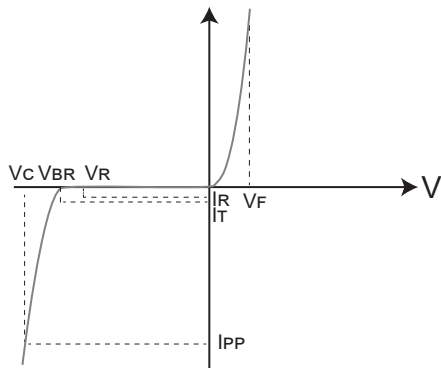

Bi-directional

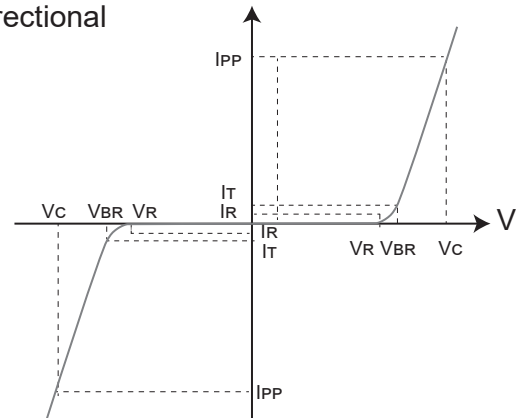

Part Numbering

SMCJ XX CA -AT

Vehicle


5% VBR Voltage Tolerance

Bi-Directional

VR Voltage


Series

Soldering Parameters

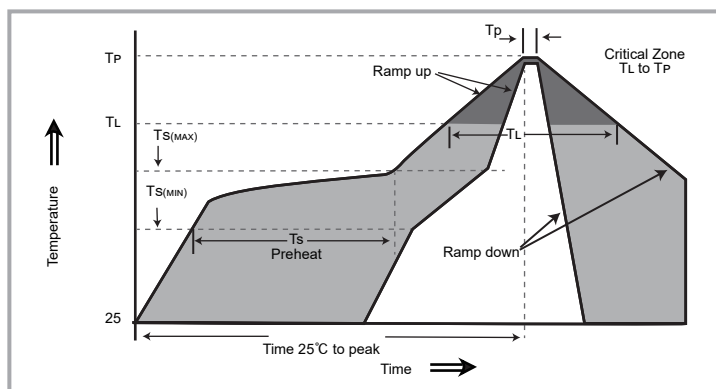

Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min (Ts(min))	150°C
	-Temperature Max (Ts(max))	200°C
	-Time (min to max) (Ts)	60 -180 Seconds
Average ramp up rate (Liquidus Temp TL) to peak		3°C/second max
Ts(max) to TL - Ramp-up Rate		5°C/second max
Reflow	- Temperature (TL) (Liquidus)	217°C
	- Time (min to max) (Ts)	60 -150 Seconds
Peak Temperature (Tp)		260 +0/-5°C
Time within 5°C of actual peak Temperature (Tp)		20 - 40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (Tp)		8 minutes Max
Do not exceed		260°C

Dimensions

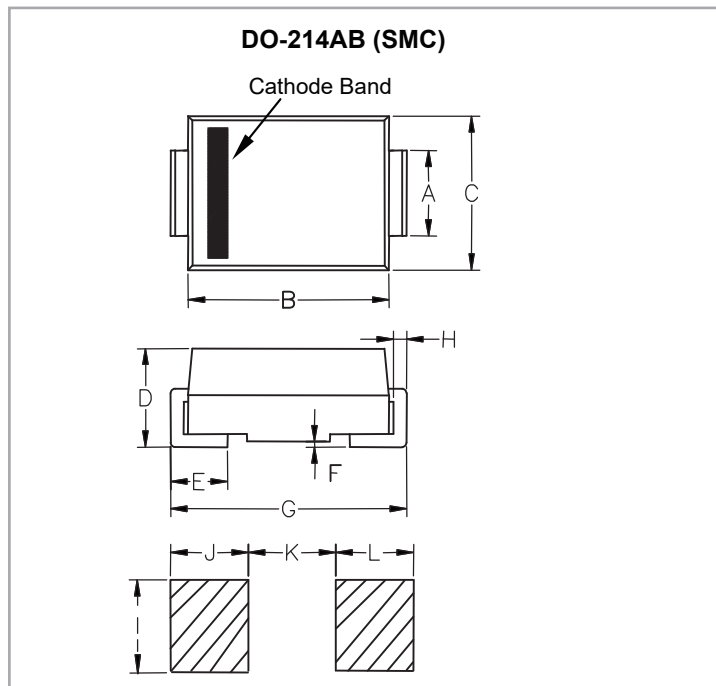

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.114	0.126	2.860	3.160
B	0.260	0.280	6.520	7.020
C	0.220	0.245	5.520	6.150
D	0.079	0.103	1.980	2.590
E	0.030	0.060	0.750	1.510
F	--	0.008	--	0.203
G	0.305	0.320	7.640	8.020
H	0.006	0.012	0.152	0.305
I	0.129	--	3.300	--
J	0.094	--	2.400	--
K	--	0.165	--	4.200
L	0.094	--	2.400	--

Ordering Information

Part Number	Component Package	Quantity	Packaging Option	Packaging Specification
SMCJ-AT Series	DO-214AB (SMC)	3,000	Tape & Reel -16mm/13"tape	EIA STD RS-481

Disclaimer

UNSEMI RESERVES THE RIGHT TO MAKE CHANGE ON OUR PRODUCTS , PRODUCTS SPECIFICATION AND DATA WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

UN SEMICONDUCTOR LIMITED its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "UNSEMI") does not give any representations or warranties for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

In no event shall UNSEMI be liable for any indirect, incidental, punitive, special or consequential damages (including any and all implied warranties, warranties of fitness for particular purpose, non-infringement and merchantability.) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Statements regarding the suitability of products for certain types of applications are based on UNSEMI knowledge of typical requirements that are often placed on UNSEMI products in generic applications. Such statements are not binding, statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify UNSEMI's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise agreed in writing, UNSEMI product is not designed, authorized or warranted to be suitable for use in medical life-saving, or life-sustaining application , nor in applications where failure or malfunction of a UNSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. UNSEMI and its suppliers accept no liability for inclusion or use of UNSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

All referenced brands, product names, service names and trademarks are the property of their respective owners.