

PESD0603E Series

ROHS

Surface Mount Polymeric ESD Suppressor

Description



www.unsemi.com.tw

PESD0603E polymeric ESD suppressor help protect sensitive electronic equipment against electrostatic discharge (ESD) without distorting data signals. This protection is a result of its ultra-low capacitance of only 0.05 pF (I/O to GND), and it can be used to help equipment to pass IEC61000-4-2 level 4 test (15KV air, 8KV contact discharge).


Features

- ◆ The best ESD protection for high speed, low voltage applications
- ◆ RoHS compliant and halogen free
- ◆ Compact size for EIA 0603
- ◆ Ultra low capacitance, 0.05 pF (typ.)
- ◆ Extremely quick response time (<1ns)
- ◆ Extremely low leakage current
- ◆ Bi-directional, single line protection


Applications

- ◆ Smart Phone/Mobile Internet Device
- ◆ Laptop/Desktop Computer
- ◆ Bi-directional, single line protection
- ◆ Antennas (Cell Phones, GPS...)
- ◆ High Speed Ethernet
- ◆ USB 3.0 and USB 3.1

Caution: This component is designed for signal line protection only, not intended to be used on power lines or for power bus applications.

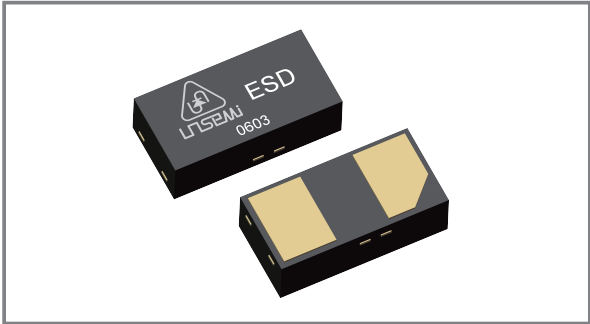

Functional Diagram

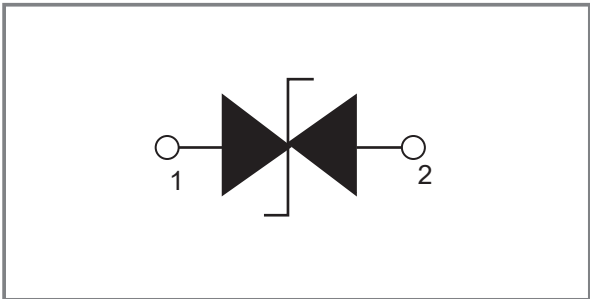

Order Information

Type	Package	Size (mm)	Delivery Form	Delivery Quantity
PESD0603EXXV	0603	1.60x0.80x0.40	7" T&R	5,000

Electrical Characteristics @ 25°C Unless Otherwise Specified)

Part Number	Working Voltage Vdc	Capacitance @10MHz Cp	Leakage Current @Vdc IL	ESD Pulse Withstand	Clamping Voltage Vc	Trigger Voltage Vt	Maximum ESD IEC61000-4-2
	V	pF	μA	IEC61000-4-2 8KV contact discharge			
	Max.	Typ.	Max.	Max.	Typ.	Typ.	
PESD0603E03V	3.0	0.05	0.05	1000	40	450	Contact Discharge Voltage: 8 KV Air Gap Discharge Voltage: 15 KV
PESD0603E05V	5.0	0.05	0.05	1000	40	450	
PESD0603E07V	7.0	0.05	0.05	1000	40	450	
PESD0603E08V	8.0	0.05	0.05	1000	40	450	
PESD0603E10V	10.0	0.05	0.05	1000	40	450	
PESD0603E12V	12.0	0.05	0.05	1000	40	450	
PESD0603E14V	14.0	0.05	0.05	1000	40	450	
PESD0603E15V	15.0	0.05	0.05	1000	40	450	
PESD0603E18V	18.0	0.05	0.05	1000	40	450	
PESD0603E24V	24.0	0.05	0.05	1000	40	450	
PESD0603E32V	32.0	0.05	0.05	1000	40	450	

Notes: Trigger and clamping voltage are measured per IEC 61000-4-2, 8KV contact discharge method.

General Technical Data

Operating Temperature	-40 ~ +85°C
Storage Temperature (on board)	-55 ~ +125°C
Response Time	<1ns
Solderability	245 ± 5°C, 3 ± 1sec.
Solder Leach Resistance	260 ± 5°C, 10 ± 1sec.

Environmental

Item	Specifications	Test Condition
Bias Humidity	IL ≤ 100 nA	85%RH, 85°C, Working Voltage, 1000 hrs
Thermal Shock		-55°C to 125°C, 30 min. cycle, 1000 cycles
Preconditioning		125°C, 24H; 85°C, 85%RH, 162H; 260°C Reflow, 3 Times

Part Numbering

PESD 0603 E 05V



Product Series

EIA Size

Operating Voltage Designator

Product Version



Eye Diagram Measurement

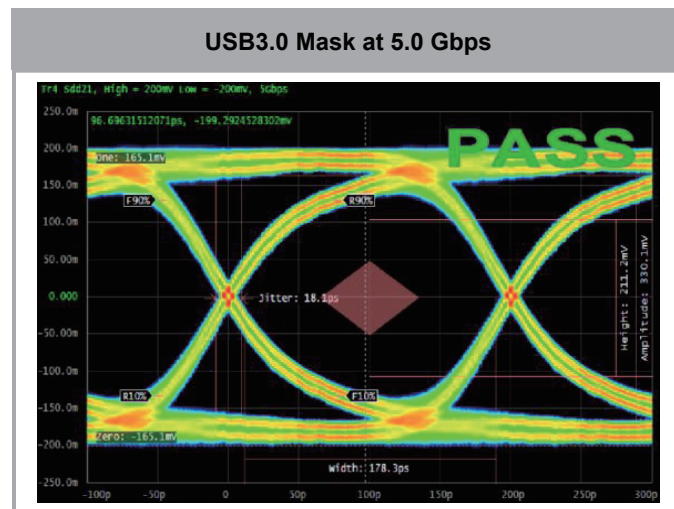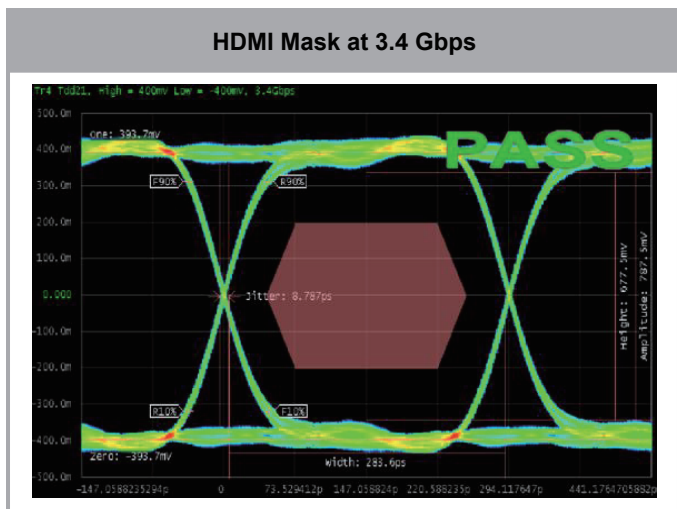


ESD Protection for Signal Line

The PESD is designed for the protection of one bidirectional data line from ESD damage.


- ◆ Place the PESD as close to the input terminal or connector as possible.
- ◆ Minimize the path length between the PESD and the protected signal line.
- ◆ Use ground planes whenever possible.

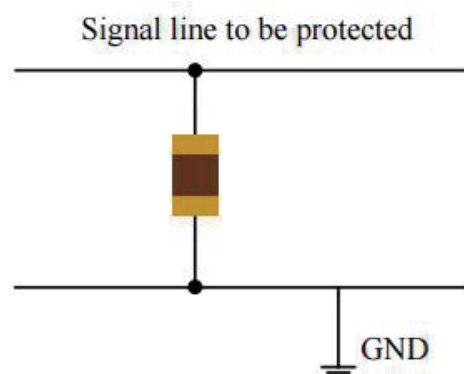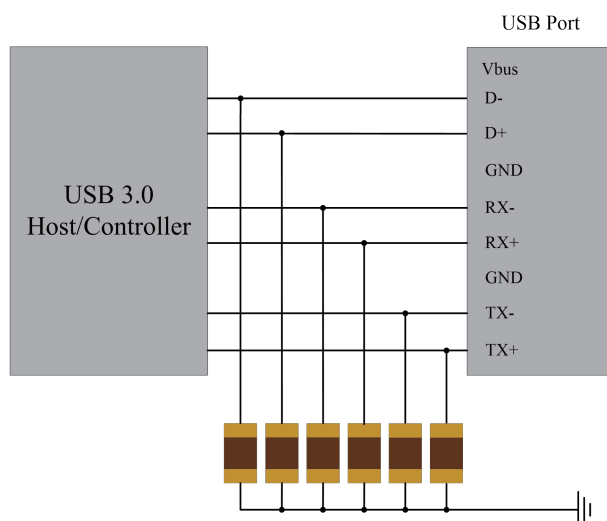

Package Dimension

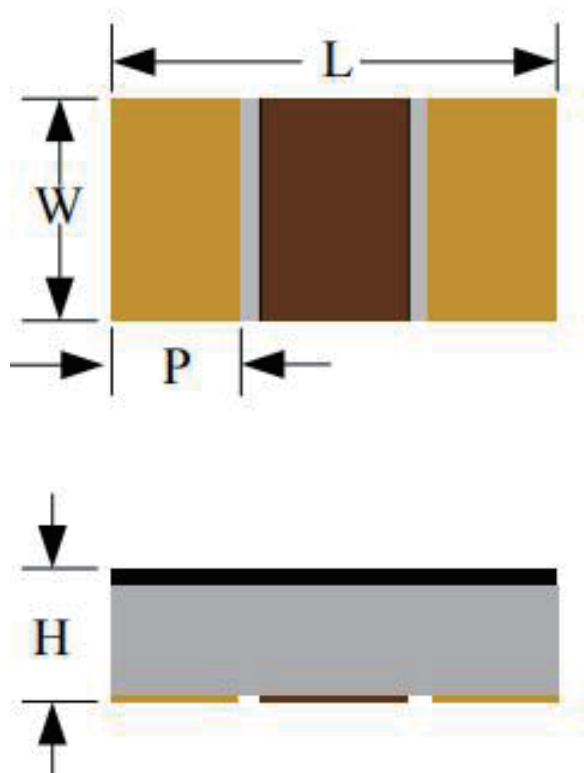

Recommended Solder Pad Footprint

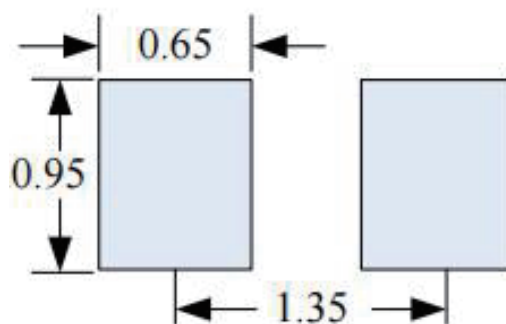

*Sizes in mm

Notes:


This solder pad layout is for reference purposes only.

Model	Unit: Millimeters		
	Min	Typ.	Max.
L(mm)	1.45	1.60	1.75
W(mm)	0.70	0.80	0.95
H(mm)	0.26	0.40	0.46
P(mm)	0.20	0.35	0.50




Surface Mount Polymeric ESD Suppressor

Taping Specification Unit: mm




A	B	W	F	E	P1	P2	P0	ΦD0	K	T
1.00 ± 0.03	1.90 ± 0.03	8.00 ± 0.10	3.50 ± 0.05	1.75 ± 0.10	2.00 ± 0.05	2.00 ± 0.05	4.00 ± 0.10	1.55 ± 0.05	0.43 ± 0.03	0.45 ± 0.05

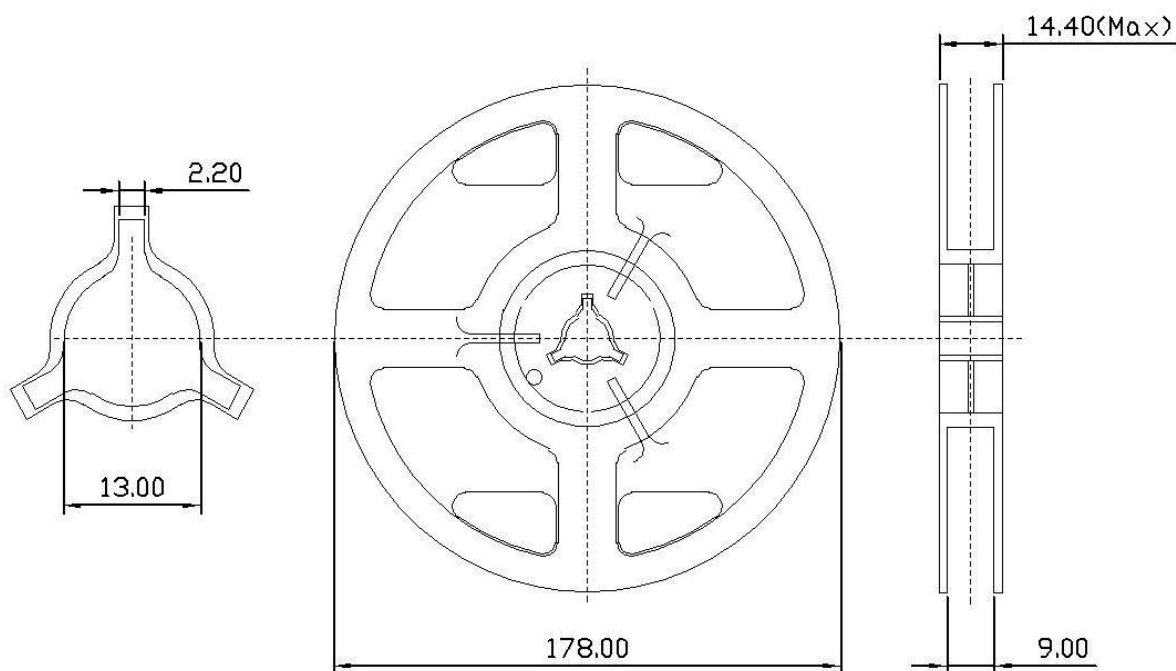

Soldering Parameters

FIG.5: Reflow condition

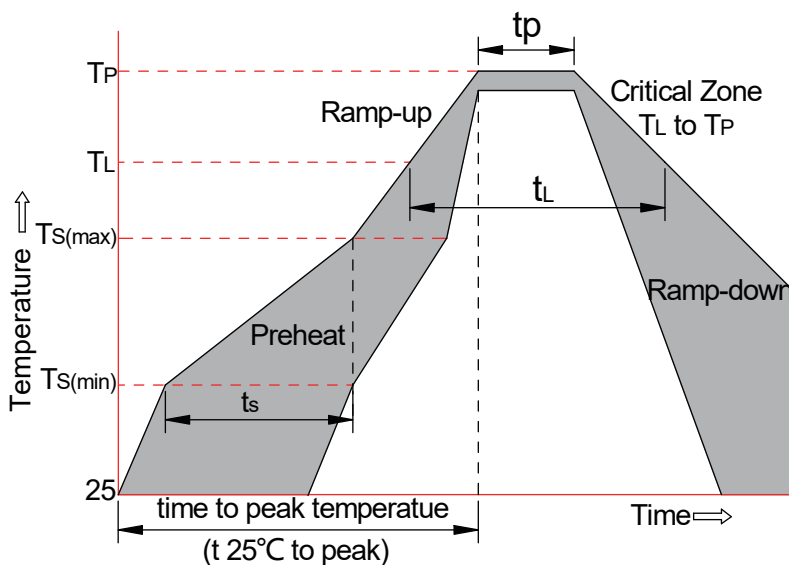

Profile Feature	Pb-Free Assembly
Pre Heat	
Temperature Min (T_{smin})	150 °C
Temperature Max (T_{smax})	200 °C
Time (t_s) from (T_{smin} to T_{smax})	60-120 seconds
Ramp-up Rate (T_L to T_P)	3 °C/second max.
Liquidus temperature (T_L)	217 °C
Time (t_L) maintained above T_L	60-150 seconds
Peak package body temperature (T_P)	260(+0/-5)°C
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	30* seconds
Ramp-down Rate (T_P to T_L)	6 °C/second max.
Time 25 °C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature (T_P) is defined as a supplier minimum and a user maximum.	

Disclaimer

UNSEMI RESERVES THE RIGHT TO MAKE CHANGE ON OUR PRODUCTS , PRODUCTS SPECIFICATION AND DATA WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

UN SEMICONDUCTOR LIMITED its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "UNSEMI") does not give any representations or warranties for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

In no event shall UNSEMI be liable for any indirect, incidental, punitive, special or consequential damages (including any and all implied warranties, warranties of fitness for particular purpose, non-infringement and merchantability.) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Statements regarding the suitability of products for certain types of applications are based on UNSEMI knowledge of typical requirements that are often placed on UNSEMI products in generic applications. Such statements are not binding, statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify UNSEMI's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise agreed in writing, UNSEMI product is not designed, authorized or warranted to be suitable for use in medical life-saving, or life-sustaining application , nor in applications where failure or malfunction of a UNSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. UNSEMI and its suppliers accept no liability for inclusion or use of UNSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

All referenced brands, product names, service names and trademarks are the property of their respective owners.